


ADWDS9560AtableDataLoadCntl

This job reads from a sequential file and writes to DB2 tables DATA_LOAD_CNTL and DATA_LOAD_CNTL_H.

[Return to [ADWDS Common Jobs](#)]

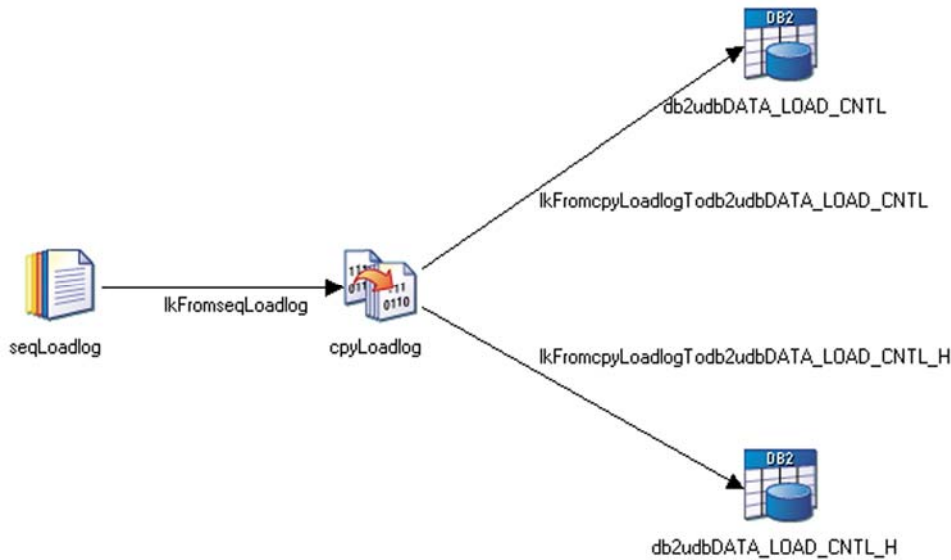

Project Name	ADWDS	
Job Name	ADWDS9560AtableDataLoadCntl	
Common Job	Yes	
Job Scheduled	On-Demand	
Job Dependencies		
Link Name	Ref #	Description
lkFromseqLoadlog	L1	Reads from sequential-file stage seqLoadlog (LOADCNTL) and passes the output to copy stage cpyLoadlog. The output has the table name (TBL_N), load process ID (LOAD_PRCS_I), load process date (LOAD_PRCS_D), and load process time (LOAD_PRCS_TI).
lkFromcpyLoadlogTodb2udbDATA_LOAD_CNTL Coded name: lkFromcpyLoadlogTodb2udbDATA_L	L2	Copies the records and passes the output to table DATA_LOAD_CNTL. The output has the latest (ORCHESTRATE) values of the table name (TBL_N), load process ID (LOAD_PRCS_I), load process date (LOAD_PRCS_D), and load process time (LOAD_PRCS_TI).
lkFromcpyLoadlogTodb2udbDATA_LOAD_CNTL_H Coded name: lkFromcpyLoadlogTodb2udbDATA_L	L3	Copies the records and passes the output to table DATA_LOAD_CNTL_H. The output has the table name (TBL_N), load process ID (LOAD_PRCS_I), load process date (LOAD_PRCS_D), and load process time (LOAD_PRCS_TI).

Validation/Trending/ ACR/Restart	Rules	Expected Results
Validation	IkFromcpyLoadlogTodb2udbDATA_LOAD_CNTL is equal to IkFromseqLoadlog.	L2=L1
Validation	IkFromcpyLoadlogTodb2udbDATA_LOAD_CNTL_H is equal to IkFromseqLoadlog.	L3=L1
Restartability		This job can be restarted without any additional validations.

Notes on Validations

[Record any additional information to assist in validation]